




**High Capacity
Heavy Duty Design**

RCR812 HAY RUNNER



Help prevent field damage with the RCR812 Hay Runner.

- 8, 10 & 12 wheel models
- Independent rake arms
- 55" & 60" rake wheels
- High clearance frame
- Red or green rake
- Front wheel lock up on 10- and 12-wheel models
- Greasable wheel hubs
- Narrow transport width
- Easy rake angle adjustment with turnbuckle
- 15" tires
- Optional poly insert wind guards
- Optional tandem axles
- Optional center wheel
- Front center wheel kit with floating 55" wheels
- 3"x 12" cylinders
- Rear two wheels pivot to adjust windrow

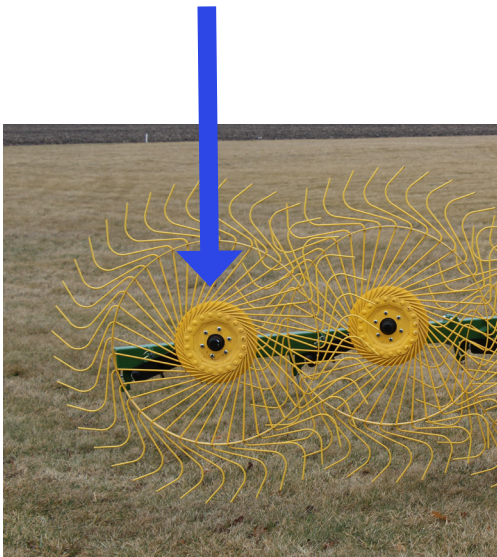

SPECIFICATIONS

RCR812 HAY RUNNER



Rear Hinging	RCR8		RCR10		RCR12	
Raking width*	MIN	MAX	MIN	MAX	MIN	MAX
	17'	20½'	19'	22½'	21'	26'
Number of wheels	8		10		12	
Weight	1,960 lbs.		2,135 lbs.		2,300 lbs.	
	MIN			MAX		
Transport width**	8'			10½'		
Transport length**	17'			21'		
Transport height**	9'			11'		
Windrow width**	3'			6'		
Wheel hubs & bearings	Greaseable Tapered Roller Bearings					
Wheel diameter	55" & 60"					
Tine diameter	7MM & 7.5MM					
Tines per wheel	40					
Rake wheel suspension	Independent arm for each wheel - Teflon bushings at pivot					
Ground pressure adjustment	Adjustable torsion spring on each sheel					
Hydraulic cylinders	3" x 12" double acting					
Hydraulic pressure requirement	Minimum 1900 PSI					
Hydraulic remotes required	1 set					
Tires	205/75-R15" Radial					
Hydraulic center wheel kit	Optional					
Walking Tandem Axles	Optional					
Wind Guards	Optional					

*Varies depending on crop condition

**Dimensions vary per model

Specifications subject to change.



MANUFACTURED BY **OGDEN**
Metalworks, Inc.

www.ogdenequipment.com

PO Box 128 | 301 N Marilyn Ave.
Ogden, IL 61589
217-582-2552